
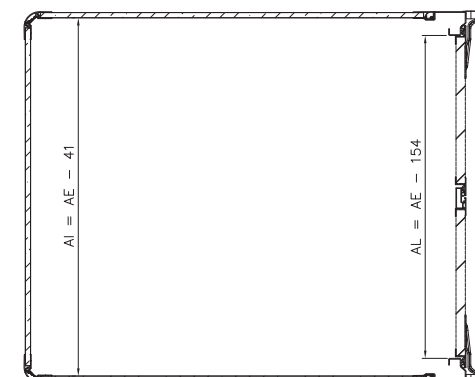
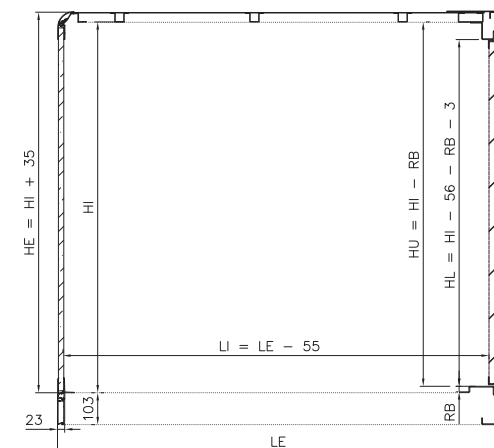


Model K. Plywood kit 17 mm

- » **Roof:** Made of translucent polyester 1.6 mm thickness, reinforced using omegas of galvanized steel omegas (DX-F5 cold lamination) 1 mm thickness, every 600 mm. All these parts are screwed and glued during the fabrication process. The perimeter is made of aluminium profiles (alloy 6063).
- » **Sidewall and frontwall:** Plywood panel of 17 mm thickness. Fire resistant panel, factor M2. Aluminium profiles (alloy 6063). Exterior part of the board in RAL 9016.
- » **Rear frame:** made of galvanized steel DX51 Z275 MAC 2.5 mm thickness, reinforced in the squares, semiautomatic welding.
- » **Rear doors:** Sandwich panel of 30 mm thickness, composed by polyester 1.6 mm / polystyrene (44 kg/m³) / polyester 1.6 mm. Fire resistant panel, factor M3. Stainless steel AISI 304 locks and hinges, recessed locks.

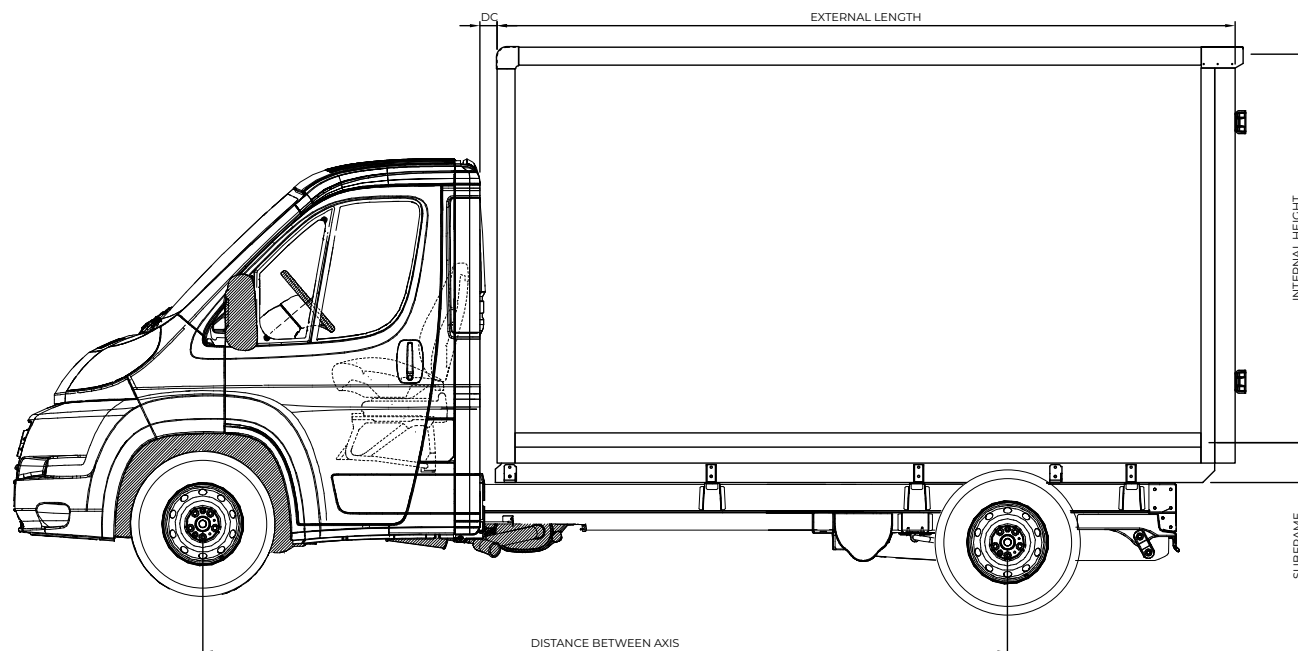

Pol. Ind. El Guadiel
Avd. Linares, 17
23210 Guarromán
Jaén (Spain)

Tel: +34 953 67 80 41
Tel: +34 953 67 80 38
www.liderkit.com

