
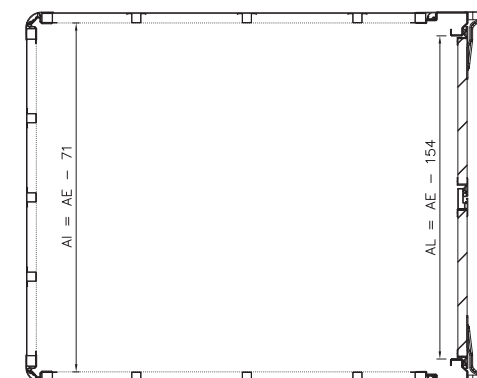
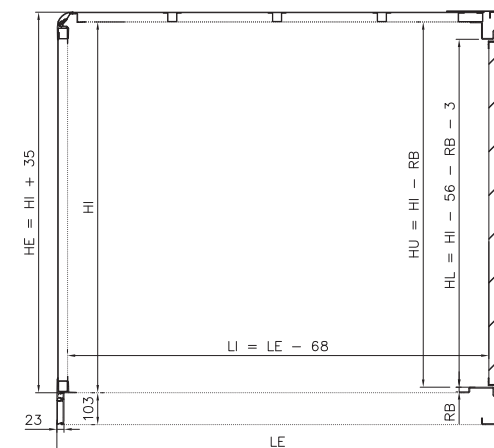


Model ZR. Kit de polyester 3 mm

- » **Roof:** Made of translucent polyester 1.6 mm thickness, reinforced using galvanized steel omegas (DX-F5 cold lamination) 1 mm thickness, every 600 mm. All these parts are screwed and glued during the fabrication process. The perimeter is made of aluminium profiles (alloy 6063).
- » **Sidewall and frontwall:** made of polyester sheet 3 mm thickness, reinforced using galvanized steel omegas (alloy 6063), every 400 mm. The perimeter is made of aluminium profiles (alloy 6063). All these parts are assembled using screws, rivets and

glued in the interior part.
This type of box body has no exterior sealing.

- » **Rear frame:** made of galvanized steel DX51 Z275 MAC 2.5 mm thickness, reinforced in the squares semiautomatic welding.
- » **Rear doors:** Sandwich panel of 30 mm thickness, composed by polyester 1.6 mm / polystyrene (44 kg/m³) / polyester 1.6 mm. Fire resistant panel, factor M3. Stainless steel AISI 304 locks and hinges, recessed locks.

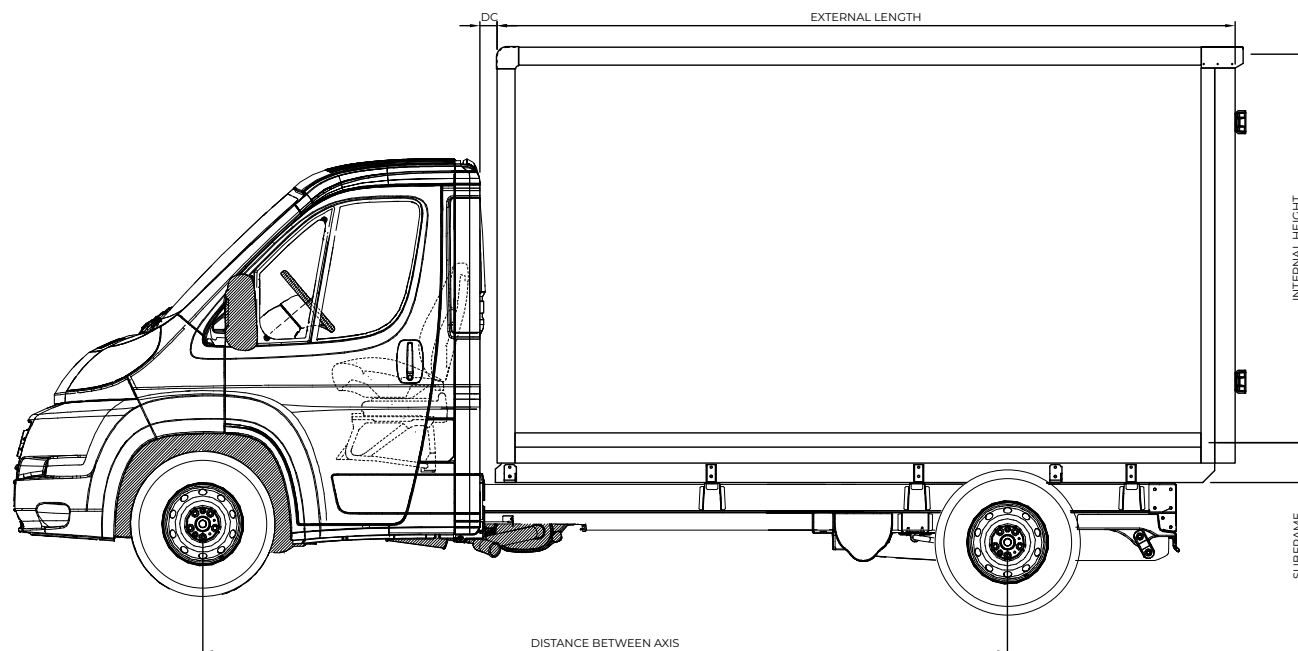

Pol. Ind. El Guadiel
Avd. Linares, 17
23210 Guarromán
Jaén (Spain)

Tel: +34 953 67 80 41
Tel: +34 953 67 80 38
www.liderkit.com

