
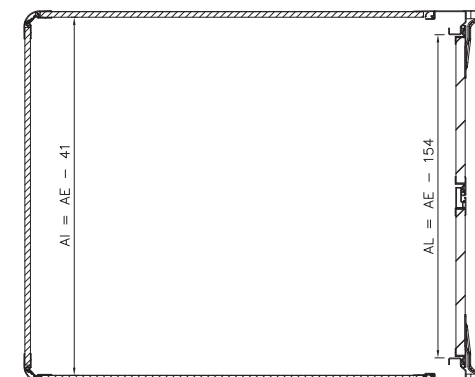
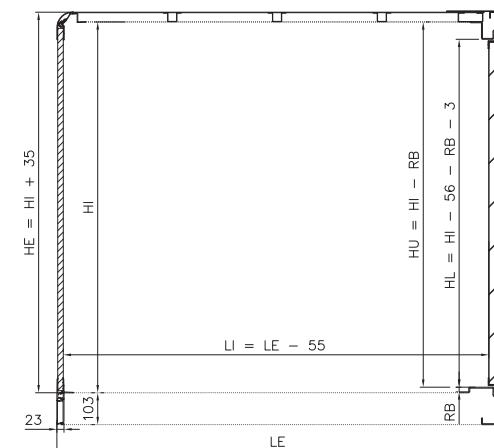


## Model E. Sandwich kit 18 mm

- » **Roof:** Made of translucent polyester 1.6 mm of thickness, reinforced using galvanized steel omegas (DX-F5 cold lamination) 1 mm thickness, every 600 mm. All these parts are screwed and glued during the fabrication process. The perimeter is made of aluminium profiles (alloy 6063).
- » **Sidewall and frontwall:** Sandwich panel 18 mm thickness, composed by polyester 1.6 mm / polystyrene (44 kg/m<sup>3</sup>) / polyester 1.6 mm. Fire resistant panel factor M3. Exterior part of polyester in RAL 9016. Aluminium profiles (alloy 6063).
- » **Rear frame:** made of galvanized steel DX51 Z275 MAC 2.5 mm thickness, reinforced in the squares, semiautomatic welding.
- » **Rear doors:** Sandwich panel of 30 mm thickness, composed by polyester 1.6 mm / polystyrene (44 kg/m<sup>3</sup>) / polyester 1.6 mm. Fire resistant panel, factor M3. Stainless steel AISI 304 locks and hinges, recessed locks.

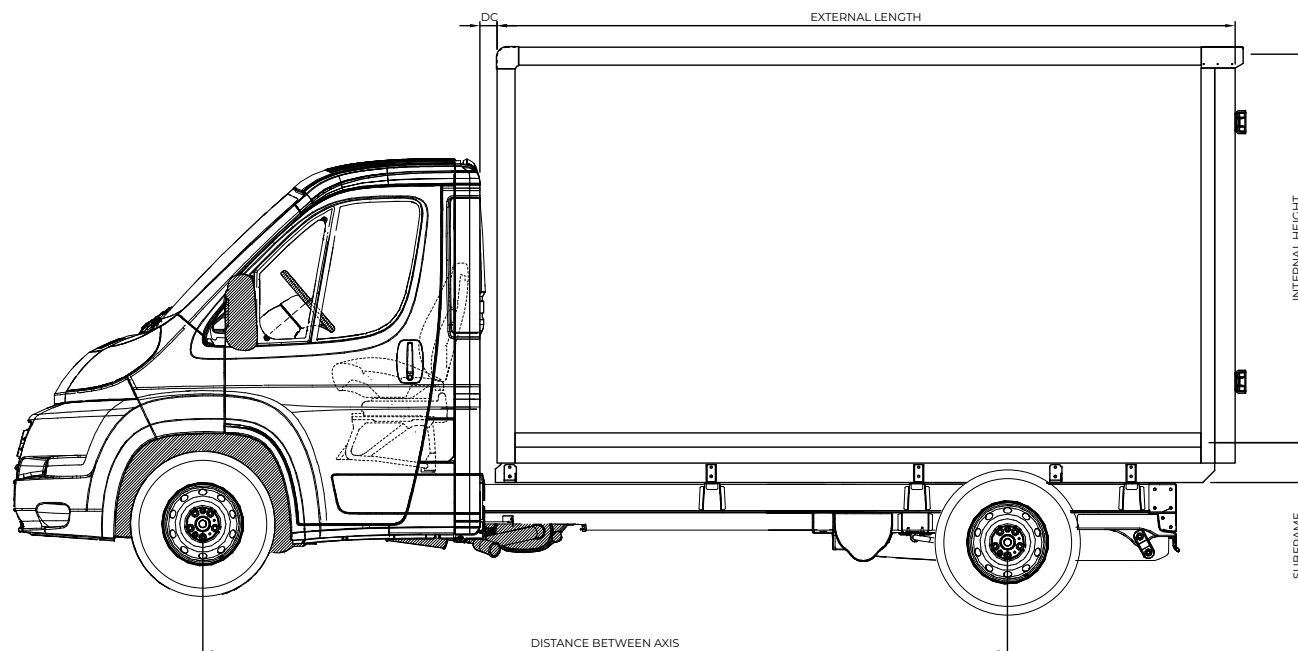

Pol. Ind. El Guadiel  
Avd. Linares, 17  
23210 Guarromán  
Jaén (Spain)

Tel: +34 953 67 80 41  
Tel: +34 953 67 80 38  
www.liderkit.com

