




Its basic composition is:

- » **Standard dimensions:** the length is available up to 13600 mm, and a width of up to 3000 mm, and thicknesses 20 mm.

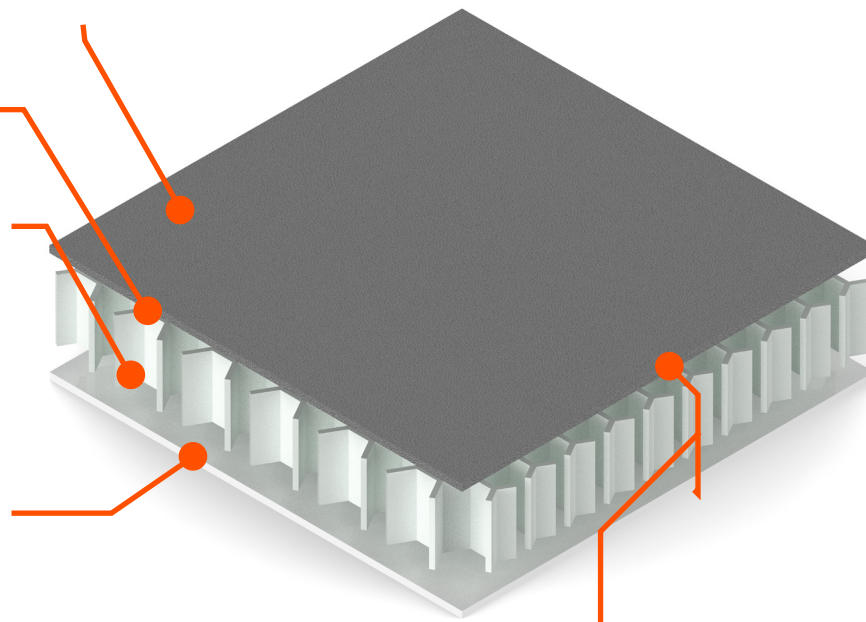

Tel: +34 953 67 80 41
Tel: +34 953 67 80 38
www.liderkit.com



		Norm
Thermal resistances	$\lambda = 0,1 \text{ (W/m}\cdot\text{K)}$	UNE-EN 12667:2002
Compression Behaviors	250 Kpa (until break)	UNE-EN 826:2013
Tensile strength perpendicular to both faces	130 kPa	UNE-EN 1607-2013
Flexural strength	63 kPa	UNE-EN 14125:1999
Mass/m2 of panel	Around 7,77 Kg/m2	N/A